

Trove2HC2 (Enclosure & Backplane) / THC2 (Backplane)

Access and Power Integration Solutions



Altronix Trove2HC2 consists of a high-capacity enclosure with removable backplane. This unit easily combines Altronix power/accessories with various combinations of Hartmann Controls boards in a streamlined package. Trove simplifies board layout and wire management, reducing installation time and labor costs.



Trove2HC2

** Boards not included*

Trove2HC2 (Trove2 Enclosure + THC2 Backplane) Features

- Accommodates the following Hartmann controllers with or without Altronix power/accessories:
 - PRS_MASTER, PRS_TDM and PRS_IO8.
 - Altronix Power Supplies
 - Altronix Sub-Assemblies
- Includes Altronix Trove2 Enclosure and one (1) removable THC2 backplane

Agency Listings

UL:

UL294 - Access Control System.

cUL:

CAN/ULC - s319-05 - Electronic Access Control Systems.

CE

European Conformity.

Features

- Simplifies board layout and wire management
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit).

Features (cont'd)

- Sixteen (16) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit).
- Accommodates up to four (4) 12VDC/7AH batteries
- 16 AWG powder coated steel
- Includes cam lock, tamper switch and mounting hardware

Trove2HC2 - Dimensions (H x W x D):

27.25" x 21.5" x 6.5" (692.15mm x 546.1mm x 165.1mm)

Trove2HC2 - Weights:

Product - 37.1 lb. (16.83 kg)
Shipping - 40.85 lb. (18.53 kg)

THC2 - Dimensions (H x W x D):


25.375" x 19.375" x 0.3125" (644.5mm x 492.1mm x 8mm)

THC2 - Weights:

Product - 8.0 lb. (3.63 kg)
Shipping - 10.0 lb. (4.53 kg)

Access Controller Position Chart for the Following Models:

Altronix/Hartmann Controls	Pem Mounting
AL400ULXB2, AL400ULXB2V, AL600ULXB, AL600XB220, AL1012ULXB, AL1012XB220, AL1024ULXB2, AL1024XB2V, eFlow4NB, eFlow4NBV, eFlow6NB, eFlow6NBV, eFlow102NB, eFlow102NBV, eFlow104NB, eFlow104NBV, Tango1B	(A)
ACM8, ACM8CB, ACMS8, ACMS8CB, LINQ8ACM, LINQ8ACMCB	(B)
ACM4, ACM4CB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB	(C)
PRS_MASTER	(D)
PRS_TDM, PRS_I08	(E)

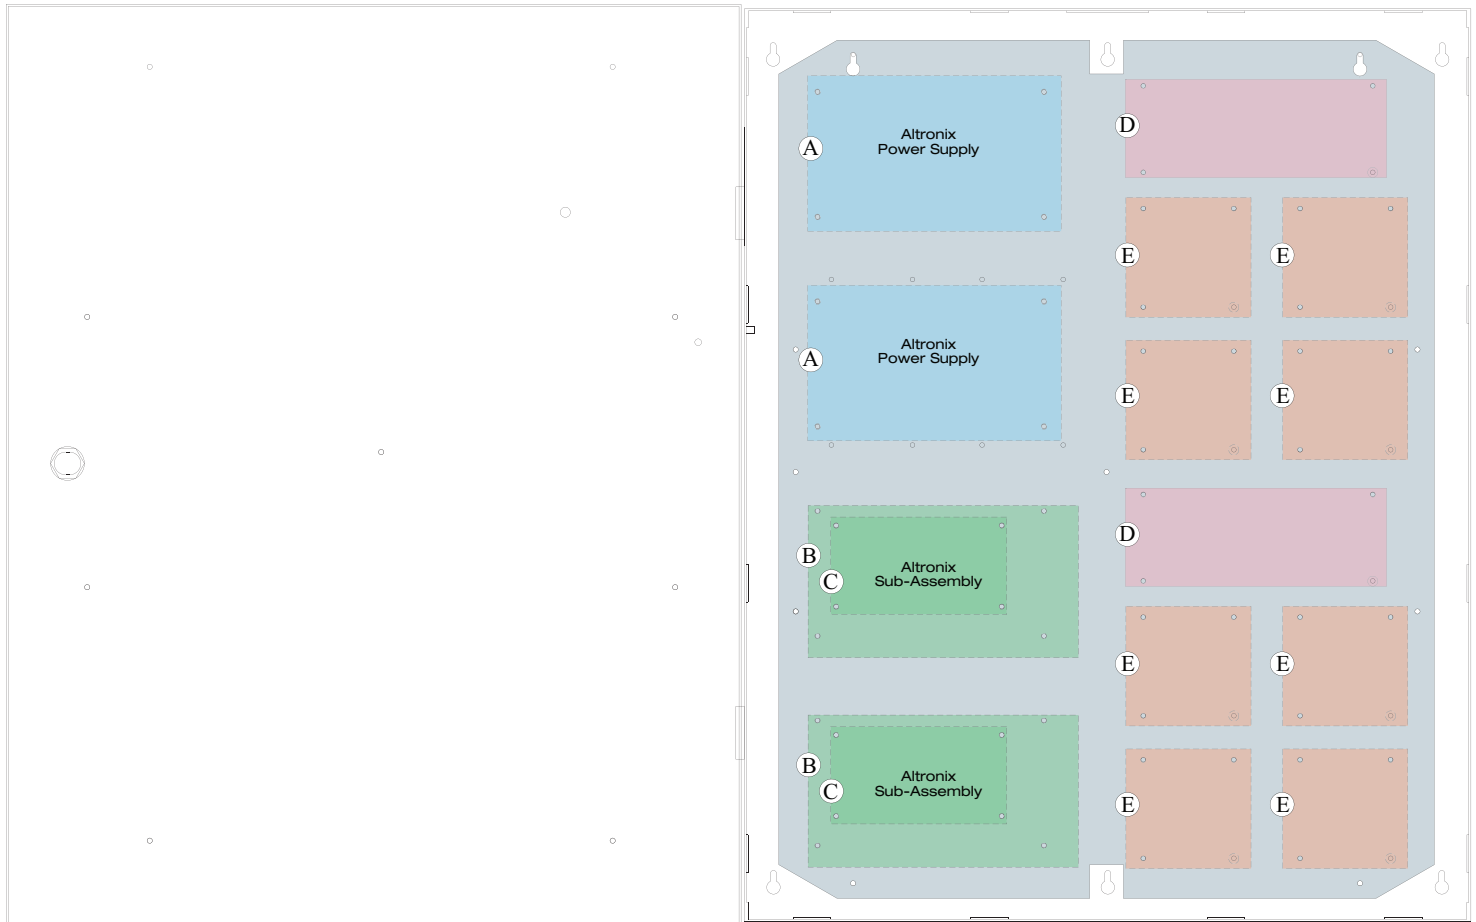

Trove2HC2 (Enclosure & Backplane) / **THC2** (Backplane)

Access and Power Integration Solutions

